


# Steel DC Powered Jib Crane 4-7 Ft. Boom 2,000 Lb. Capacity Blue

**MODEL WTJ-20-4-DC**

Overhead Lifting / Power Lift Jib Cranes

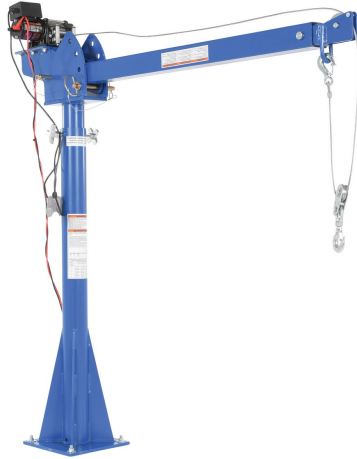

## PRODUCT OVERVIEW

A power lift Jib crane is designed for material handling applications on docks, in warehouses or in truck beds. This intermittent unit uses crane feature rotation hand brakes that offer unlimited positioning. The mast mounts permanently. Boom adjusts in one (1) foot increments and can be positioned at four (4) elevations. Folds for storage. Unit is designed for vertical lifting only. Do not use unit for lifting personnel or overhead lifting.

## KEY FEATURES

- Powered cable winch makes lifting and maneuvering easy
- Boom telescopes in and out for greater reach and versatility
- 360 Degrees swivel design allows for maximum accessibility
- Pre-drilled base plate makes mounting quick and easy

## CORE PRODUCT DATA

**ASSEMBLED WEIGHT**  
**255 lbs**

**ASSEMBLED SIZE**  
**13.5" W x 63.8125" L x 68.8125" H**

**SHIP WEIGHT**  
**260 lbs**

**PACKAGE 1 SIZE**  
**30" W x 67" D x 18" H**

**COLOR / FINISH**  
**Blue**

**FREIGHT TYPE**  
**LTL Palletized**

**AVAILABILITY**      Available

**QUICKSHIP: YES**

Products are sold through Vestil distributor partners. Contact a distributor for current pricing and ordering.

PRODUCT SPECIFICATIONS

|                                            |                   |
|--------------------------------------------|-------------------|
| Uniform Capacity (lb.)                     | 2,000             |
| Boom Reach (in.)                           | 51-1/4 to 87-1/4  |
| Boom Height (in.)                          | 59-1/2 to 106-1/2 |
| Rotation Degree                            | 360               |
| Boom Adjustment Increments (in.)           | 12                |
| Cable Length (ft.)                         | 46                |
| Cable Diameter (in.)                       | 3/16              |
| DC (volts)                                 | 12                |
| Horsepower (HP)                            | 1                 |
| Mounting Plate Length (in.)                | 12                |
| Mounting Plate Width (in.)                 | 12                |
| Capacity at 59-1/2" Fully Retracted (lbs.) | 1,100             |
| Capacity at 59-1/2" Second Position (lbs.) | 800               |
| Capacity at 59-1/2" Third Position (lbs.)  | 600               |
| Capacity at 59-1/2" Fully Extended (lbs.)  | 250               |
| Capacity at 78-1/4" Fully Retracted (lbs.) | 1,500             |
| Capacity at 78-1/4" Second Position (lbs.) | 1,200             |
| Capacity at 78-1/4" Third Position (lbs.)  | 1,000             |
| Capacity at 78-1/4" Fully Extended (lbs.)  | 600               |
| Capacity at 94-1/2" Fully Retracted (lbs.) | 1,850             |
| Overall Width (in.)                        | 13-1/2            |
| Overall Length Retracted (in.)             | 63-13/16          |
| Overall Height (in.)                       | 68-13/16          |
| Overall Storage Height (in.)               | 70                |

PRODUCT & SHIPPING REFERENCE

Shipping Point: Angola, IN 46703

Warranty:

90 Days

AVAILABLE PRODUCT RESOURCES



SCAN FOR CURRENT PRODUCT DATA

Live product page: <https://www.vestil.com/product.php?FID=582>